

### 3. Anschlussbelegung

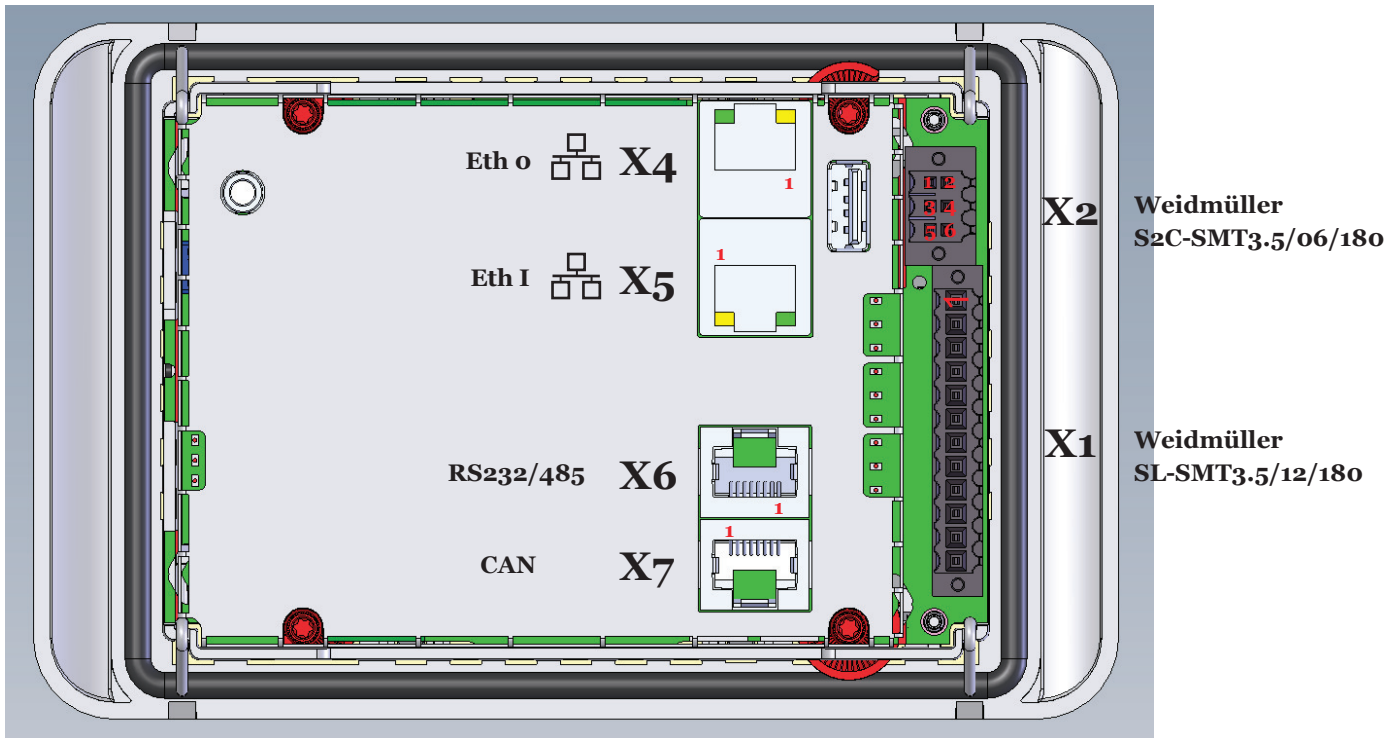


Abbildung 3: Anschlussbelegung

X1		X2		X4		X5		X6		X7	
Pin	Belegung	Pin	Belegung	Pin	Belegung	Pin	Belegung	Pin	Belegung	Pin	Belegung
1	DI 1	1	AI1 (U/T)	1	TX+	1	TX+	1	RS232 RX	1	CANH
2	DI 2	2	AI3 (U/T)	2	TX-	2	TX-	2	RS232 TX	2	CANL
3	DI 3	3	AGND	3	RX+	3	RX+	3	NC	3	ISO GND
4	DI 4	4	AGND	4		4		4	RS485 T/R+	4	NC
5	DO 1	5	AI2 (U)	5		5		5	RS485 T/R-	5	NC
6	DO 2	6	AI4 (U)	6	RX-	6	RX-	6	NC	6	NC
7	DO 3			7		7		7	(reserviert)	7	ISO GND
8	DO 4			8		8		8	ISO GND	8	NC
9	L1+ 24V IO										
10	L+ 24V										
11											
12	GND										