




MODEL EK7

BACKLASH FREE ELASTOMER COUPLINGS

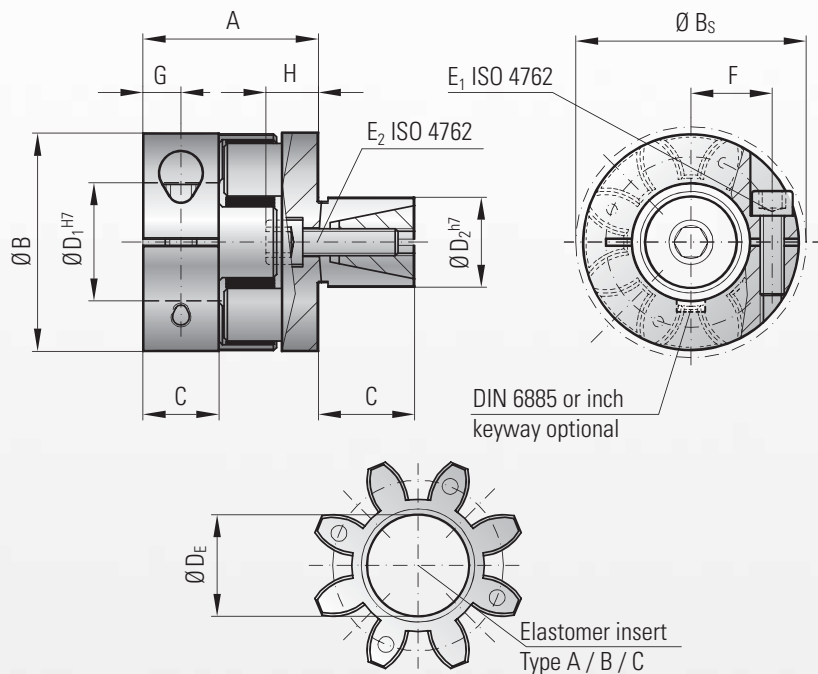

with expanding shaft

Properties:

- short compact design
- easy mounting
- concentrically machined hubs
- axial installation with expanding shaft
- backlash free
- electrically isolating

Material:

Clamping hub: up to series 450 high strength aluminum, from series 800 and up steel
Expanding shaft & cone: steel
Elastomer insert: precision molded, wear resistant, and thermally stable polymer

Design:

Two coupling hubs are concentrically machined with curved jaws. One side with clamping hub and screw per ISO 4762. One side with expanding shaft and internally tapered clamping element

Speeds:

See table below
*Please contact R+W, ISO 2.5 balance grade available

Tolerance: Overall clearance between shaft and hub 0.01 to 0.05 mm. Suggested bore tolerance for expanding shaft ISO H7

Model EK7			Series																							
Type (Elastomer insert)			5			10			20			60			150			300			450			800		
Rated torque (Nm)	T_{KN}		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Max. torque** (Nm)	T_{Kmax}		9	12	2	12.5	16	4	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240
Overall length (mm)	A		22			28			40			46			51			68			76			94		
Outside diameter (mm)	B		25			32			42			56			66.5			82			102			136.5		
Outside diameter with screw head (mm)	B_S		25			32			44.5			57			68			85			105			139		
Mounting length (mm)	C_1		8			10.3			17			20			21			31			34			46		
Mounting length (mm)	C_2		12			20			25			27			32			45			55			60		
Inside diameter range H7 (mm)	D_1		4 - 12.7			5 - 16			8 - 25			12 - 32			19 - 36			20 - 45			28 - 60			35 - 80		
Outside diameter range h7 (mm)	D_2		10 - 16			13 - 25			14 - 30			23 - 38			26 - 42			38 - 60			42 - 70			42 - 80		
Inside diameter of elastomer (mm)	D_E		10.2			14.2			19.2			26.2			29.2			36.2			46.2			60.5		
Clamping screw (ISO 4762)	E_1		M3			M4			M5			M6			M8			M10			M12			M16		
Tightening torque (Nm)			2			4			8			15			35			70			120			290		
Clamping screw (ISO 4762)	E_2		M4			M5			M6			M8			M10			M12			M16			M16		
Tightening torque (Nm)			4			9			12			32			60			110			240			300		
Distance between centers (mm)	F		8			10.5			15.5			21			24			29			38			50.5		
Distance (mm)	G		4			5			8.5			10			11			15			17.5			23		
Length (mm)	H		7			7			10			11			16			20			27			27		
Moment of inertia D_1 (10^{-3} kgm^2)	J_1		0.002			0.003			0.01			0.04			0.08			0.3			0.66			8		
Moment of inertia D_2 (10^{-3} kgm^2)	J_2		0.002			0.01			0.04			0.1			0.2			1			2.6			9		
Approx. weight (kg)			0.04			0.05			0.12			0.3			0.5			0.9			1.5			7.6		
Speed standard (min^{-1})			15,000			13,000			12,500			11,000			10,000			9,000			8,000			4,000		
*Speed balanced (10^3 min^{-1})			57	65	43	53	63	40	45	60	35	31	31	25	22	26	18	22	26	16	16	17	12	13	13	8

Information about static and dynamic torsional stiffness as well as max. possible misalignment see page 5

** Maximum transmittable torque depends on the bore diameter (overall clearance between shaft and hub 0.01 to 0.05 mm; shaft oiled)

Series	Ø 3	Ø 4	Ø 5	Ø 8	Ø 16	Ø 19	Ø 25	Ø 30	Ø 32	Ø 35	Ø 45	Ø 50	Ø 55	Ø 60	Ø 65	Ø 70	Ø 75	Ø 80
5		1.5	2	8														
10			4	12	32													
20				20	35	45	60											
60					50	80	100	110	120									
150						120	160	180	200	220								
300						200	230	300	350	380	420							
450							420	480	510	600	660	750	850					
800									700	750	800	835	865	900	925	950	1000	

Ordering example

EK7 / 20 / A / 24 / 19 / XX

Model
Series
Type Elastomer insert
Bore Ø D1 H7
Shaft Ø D2 h7
Non standard e.g. finely balanced

All data is subject to change without notice.

www.rwcouplings.com