



**The Drive to Win**

# IDM<sub>SM</sub>

## 2 or 4 Axis EtherCAT® DS402 Drive




**EtherCAT®**  
Conformance tested

The **IDM<sub>SM</sub>** is a member of the Intelligent Drive Module (IDM) series of EtherCAT® DS402 drives designed to meet the needs of OEMs employing EtherCAT-based control systems with high-precision motion stages. Controllable by any EtherCAT master, its unique multi-processor architecture leverages powerful control algorithms to maximize motion system performance, while its universal servo drive technology enables the system designer to easily control most types of motors and stages.

### Product Highlights

- > Advanced Servo Control Algorithms for Maximum Motion Performance
- > Multi-Threading Program Execution for Maximum Application Flexibility
- > Universal Motor Support for Maximum Motor/Stage Flexibility
- > Standard DS402 (CiA402) CANOpen over EtherCAT Interface
- > Max Drive Current: 5/10A Per Axis
- > Drive Supply Input: 12-48VDC
- > Analog I/O: 2/2
- > Digital I/O: 12/16
  - Any can be used as general purpose
  - 4 High-Speed Position Capture (MARK) Inputs
  - 8 Limit Sensor Inputs (2 per axis)
  - 4 Motor Brake Outputs
  - 4 High-Speed Position Event Generation (PEG) Outputs
  - 8 General Purpose Outputs
- > Functional Safety: STO, SS1

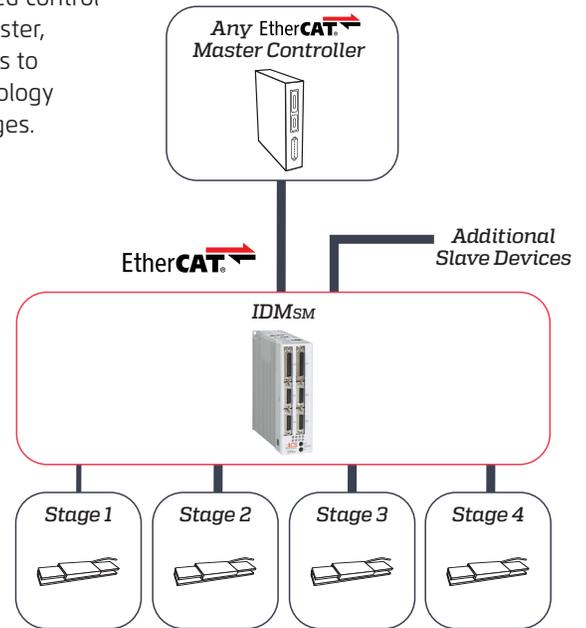

### CONFIDENCE

Leverage 35+ years of high-performance motion control expertise



### FLEXIBILITY

Control various motion stage technologies



### PERFORMANCE

Achieve a competitive advantage with higher throughput and accuracy

For the latest version of this document visit our website at [www.acsmotioncontrol.com](http://www.acsmotioncontrol.com)

Smarter Motion



## Specifications

### Logic Supply Input

- Voltage range: 24 VDC +/-5%
- Maximum Input Current: 2A @ 22.8VDC
- Protections: Reverse Polarity

### Drive Supply Input

- Voltage range: 12-48 VDC
- Maximum Input Current: Load dependent

### Amplifiers

- Number of Axes: 2 or 4
- Type: PWM 3-phase power bridge
- Motor Support
  - DC brush
  - Voice coil
  - 2 and 3 phase DC brushless
  - 2 and 3 phase stepper: Open or closed loop, up to 1024 microsteps per step, dynamic current adjustment
- Output Current: 1.25/2.5 A, 2.5/5 A, or 5/10A per axis (continuous/peak, sine amplitude)
- Peak Current Time: 1 second
- PWM Switching Frequency: 20 kHz
- Minimum Load Inductance: 25 uH per phase at 48VDC bus (contact ACS to discuss applications with lower phase inductance motors)
- Max Output Voltage: 92% of Drive Supply input voltage
- Max Output Power: 187/364 W per axis (continuous/peak)
- Protections: Short Circuit, Overcurrent, Drive Overtemperature, Motor Overtemperature, Overvoltage, Undervoltage

### EtherCAT

- Interface: Dual RJ-45, 100BASE-TX
- Communication Profiles: CoE, FoE
- Device Profiles: DS402 (CiA402)
- Modes of Operation: CSP, CSV, CST, Homing, Profile Position, Profile Velocity
- PDO Mapping: User-configurable, up to 128 bytes
- Max Cycle Rate: 4 kHz

### Other Communication Interfaces

- SPI: 8 word (16 bits per word) 4 MHz bi-directional master/slave interface for data input to / output from custom servo algorithms
- Ethernet: 100/1000 Mbps for product setup and configuration
- RS-232: Up to 115200 bps for product setup and configuration

### Profile Generation

- 3rd order with smooth on-the-fly endpoint modification

### Servo Control Algorithms

- Standard
  - Cascaded PIVFF with loop shaping filters
  - Advanced feedforward
  - Multi-input multi-output (MIMO) gantry
  - Dual loop
  - Disturbance rejection
  - Gain Scheduling
  - Field-oriented control
  - Space vector modulation
- Optional
  - Custom algorithms to meet demands of unique applications (contact ACS)
- Loop Sampling and Update Rate: 20 kHz position, 20 kHz velocity, 20 kHz current

### Real-Time Programming

- Language: ACSPL+ object-oriented multi-threading
- Number of User-Programmable Buffers (Threads): 4
- Max Program Cycle Rate: 4 kHz
- Max Data Collection Rate: 20 kHz up to 4 variables
- RAM: 256MB
- Flash: 1GB

### Feedback

- Total Number of Channels: 4
- Incremental
  - AqB Encoders (Default type)
    - Max Frequency: 50 MHz
    - Electrical Interface: RS-422
    - Error Detection: Encoder not connected, illegal transition
  - SinCos Encoders / Analog Hall Sensors (Optional)
    - Max Frequency: 500 kHz or 10 MHz, according to ordering option
    - Electrical Interface: 1 V peak to peak +/-10%
    - Max Multiplication: 4,096 (per full signal period)
    - Error Detection: Not connected
    - Compensation: Phase, Gain, Offset
    - Note: The drive automatically generates a digital quadrature echo of the SinCos encoder signal and sends it as an output to the AqB encoder pins
  - Digital Hall Sensor Inputs
    - Qty: 3 per axis (12 total)
    - Electrical Interface: 5V, Single-ended, source, opto isolated
    - Note: Used for initial commutation, not for position servo feedback
  - Limit Sensor Inputs (Usable as general purpose)
    - Qty: 2 per axis (8 total)
    - Electrical Interface: 5/24V ±20%, opto-isolated, sink or source (jumper selectable)
- Absolute (Optional)
  - Types: BiSS-C, EnDat 2.1 & 2.2, Smart-Abs, SSI, Sanyo Denki, Panasonic A4
  - Max Frequency: EnDat- 2MHz, Smart-Abs-2.5MHz, Biss-C- 10MHz, Panasonic- 2.5MHz, Sanyo- 2.5MHz
  - Electrical Interface: RS-485
  - Error Detection: CRC, timeout, encoder not ready
- Supply Output: 5.1V. Total available current 1.5A for all analog encoders and 1.5A for all digital encoders
- ID Chip Interface: 1 per axis. For identification of compatible stages' configuration parameters.

### Functional Safety I/O (Optional)

- Safe Torque Off (STO) Input
  - Electrical Interface: Dual-channel 24V isolated
  - Safety Standards: See Standards and Certifications Section
- Safe Stop 1 (SS1) Feature
  - Deceleration time till STO activation: 110-230ms.
  - Exact deceleration time value is fixed (SS1-t functionality) and depends on product configuration (see user manual for more details)

### Digital I/O (All are usable as general purpose)

- High-Speed Position Capture (MARK) Inputs
  - Qty: 4
  - Electrical Interface: 5/24V ±20%, Opto-isolated, two terminals
  - Max Capture Frequency: 2 kHz

## Specifications Continued

- Limit Sensor Inputs
  - Qty: 8 (See Feedback section for more details)
- High-Speed Position Event Generation (PEG) Outputs
  - Qty: 4
  - Electrical Interface: RS-422
  - Max Pulse Frequency: 10 MHz
  - Pulse Width Range: 27 ns to 1.745 ms
- Motor Brake Outputs
  - Qty: 4
  - Electrical Interface: 5/24V ±20%, opto-isolated, sink or source (jumper selectable)
  - Output Current: 100 mA
- General Purpose Outputs
  - Qty: 8
  - Max Update Frequency: 4 kHz
  - Electrical Interface: RS-422

### Analog I/O (All are usable as general purpose)

- Analog Inputs
  - Qty: 2
  - Electrical Interface: +/-10V differential or +/-5V single ended
  - Resolution: 12 bit
  - Max Sampling Frequency: 4 kHz
- Analog Outputs
  - Qty: 2
  - Electrical Interface: +/-10V differential or +/-5V single ended
  - Resolution: 10 bit
  - Max Ripple: 25 mV
  - Max Load: 10 kOhm
  - Max Update Frequency: 4 kHz

### Standards and Certifications (Pending)

- CE Self Declaration: Yes
- CE Electrical Safety: IEC61800-5-1
- CE EMC: EN 61800-3
- UL Electrical Safety: UL 61800-5-1
- STO Functional Safety: IEC 61800-5-1, IEC 61800-5-2
- SS1 Functional Safety: IEC 61800-5-1, IEC 61800-5-2
- EtherCAT Technology Group Conformance Tested: Yes

### Physical

- Dimensions: 168 x 158 x 48.3 mm
- Weight: 800g
- Environmental
  - Operational Temperature: 0 to 50C. See user manual for external fan cooling requirements above 40C ambient temperature.
  - Humidity: 5 to 90% non-condensing humidity
  - Storage and Transportation Temperature Range: -25 to 60C
  - Shock: 50 m/s<sup>2</sup> (5 G)
  - Vibration: 10 m/s<sup>2</sup> (1 G)

### Optional Accessory Products

- XDMsm-ACC1: Mating Connector Kit
- STO-ACC1: STO Breakout Cable
- SPI-ACC1: SPI Breakout Cable
- RS232-ACC1: RS232 Adapter Cable

## Ordering Options

	Field	Example selection by user	Optional Values
Number of Axes	1	4	2, 4
Current Rating (Amps peak of sine)	2	C	A=1.25/2.5A, B=2.5/5A, C=5/10A
Number of 500 kHz SinCos Encoder Channels	3	2	0, 1, 2, 3, 4
Number of 10 MHz SinCos Encoder Channels	4	0	0, 1, 2, 3, 4
Number of Absolute Encoder Channels	5	1	0, 1, 2, 3, 4
Functional Safety	6	T	N=None, T=STO & SS1
Reserved for future	7	N	N = N/A
Reserved for future	8	N	N = N/A
Reserved for future	9	N	N = N/A
Reserved for future	10	N	N = N/A

**Example P/N:** IDMsM-4C201-TNANN **Description:** 4 axis 5/10A, 2x SinCos 500kHz encoder, 1x Absolute encoder, STO & SS1

Field	1	2	3	4	5	6	7	8	9	10
P/N IDMsM	4	C	2	0	1	T	N	N	N	N



For the latest version of this document visit our website at [www.acsmotioncontrol.com](http://www.acsmotioncontrol.com)

Smarter Motion

