


**Connect.
Command.
Control.**

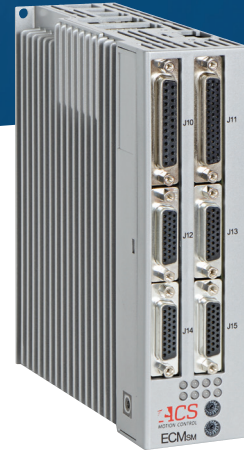


ECM_{sm}

2 or 4 Axis All-In-One Motion Controller with Integrated Drives

The **ECM_{sm}** is a member of the Economical Control Modules (ECM) series of compact, highly integrated all-in-one motion controller and drives solutions designed to meet the needs of OEMs with cost-sensitive motion control applications. Its unique multi-processor architecture leverages powerful control algorithms to achieve best-in-class performance, while its universal servo drive technology enables the system designer to easily control most types of motors and stages.

Product Highlights

- > Compact Industrial Package for Streamlined OEM Integration
- > Comprehensive Software Tools for Reducing Time to Market
- > Universal Motor Support for Maximum Motor/Stage Flexibility
- > Max Drive Current: 5/10A Per Axis
- > Drive Supply Input: 12-48VDC
- > Analog I/O: 2/2
- > Digital I/O: 12/16
 - Any can be used for general purpose
 - 4 High-Speed Position Capture (MARK) Inputs
 - 8 Limit Sensor Inputs (2 per axis)
 - 4 Brake Outputs
 - 4 High-Speed Position Event Generation (PEG) Outputs
 - 8 General Purpose Outputs
- > Functional Safety: STO, SS1

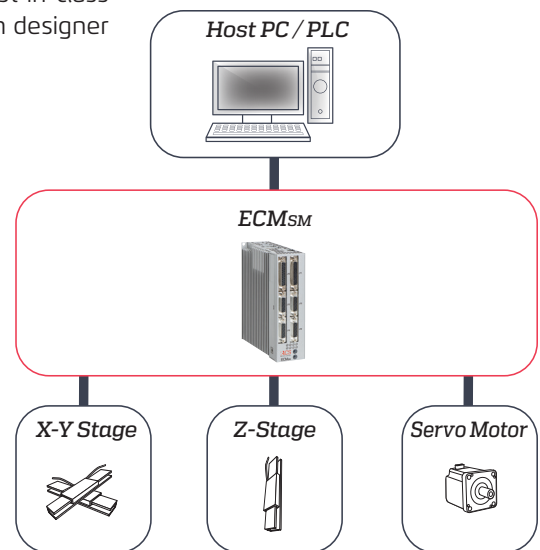


VALUE

*Achieve excellent performance
at an economical price*



FLEXIBILITY

*Control various motion
stage technologies*



INTEGRATION

*Minimize design effort
with all-in-one industrially
packaged solution*

For the latest version of this document visit our website at www.acsmotioncontrol.com

Smarter Motion

ACS
MOTION CONTROL

Specifications

Logic Supply Input

- Voltage range: 24 VDC +/-5%
- Maximum Input Current: 2A @ 22.8VDC
- Protections: Reverse polarity

Drive Supply Input

- Voltage range: 12-48 VDC
- Maximum Input Current: Load dependent

Amplifiers

- Number of Axes: 2 or 4
- Type: PWM 3-phase power bridge
- Motor Support
 - DC brush
 - Voice coil
 - 2 and 3 phase DC brushless
 - 2 and 3 phase stepper: Open or closed loop, up to 1024 microsteps per step, dynamic current adjustment
- Output Current: 1.25/2.5 A, 2.5/5 A, or 5/10A per axis (continuous/peak, sine amplitude)
- Peak Current Time: 1 second
- PWM Switching Frequency: 20 kHz
- Minimum Load Inductance: 25 uH per phase at 48VDC bus (contact ACS to discuss applications with lower phase inductance motors)
- Max Output Voltage: 92% of Drive Supply input voltage
- Max Output Power: 187/364 W per axis (continuous/peak)
- Protections: Short Circuit, Overcurrent, Drive Overtemperature, Motor Overtemperature, Overvoltage, Undervoltage

Communication Interfaces

- Ethernet: 100/1000 Mbps TCP/IP, Modbus, Ethernet/IP
- RS-232: Up to 115200 bps
- SPI: 8 word (16 bits per word) 4 MHz bi-directional master/slave interface for data input to / output from custom servo algorithms

Real-Time Programming

- Language: ACSPL+ object-oriented multi-threading
- Number of User-Programmable Buffers (Threads): 6
- Program Cycle Rate: 1 kHz
- Max Data Collection Rate: 20 kHz up to 4 variables
- RAM: 256 MB
- Flash: 1 GB

Profile Generation

- 3rd order with smooth on-the-fly endpoint modification

Servo Control Algorithms

- Standard
 - Cascaded PIVFF with loop shaping filters
 - Advanced feedforward
 - Multi-input multi-output (MIMO) gantry
 - Dual loop
 - Disturbance rejection
 - Gain scheduling
 - Field-oriented control
 - Space vector modulation
- Optional
 - Custom algorithms to meet demands of unique applications (contact ACS)
- Loop Sampling and Update Rate: 20 kHz position, 20 kHz velocity, 20 kHz current

Feedback

- Total Number of Channels: 4
- Incremental

- AqB Encoders (Default type)
 - Max Frequency: 50 MHz
 - Electrical Interface: RS-422
 - Error Detection: Encoder not connected, illegal transition
- SinCos Encoders / Analog Hall Sensors (Optional)
 - Max Frequency: 500 kHz
 - Electrical Interface: 1 V peak to peak +/-10%
 - Max Multiplication: 4,096 (per full signal period)
 - Error Detection: Not connected
 - Compensation: Phase, Gain, Offset
 - Note: The drive automatically generates a digital quadrature echo of the SinCos encoder signal and sends it as an output to the AqB encoder pins
- Digital Hall Sensor Inputs
 - Qty: 3 per axis (12 total)
 - Electrical Interface: 5V, Single-ended, source, opto-isolated
 - Note: Used for initial commutation, not for position servo feedback
- Limit Sensor Inputs (Usable as general purpose)
 - Qty: 2 per axis (8 total)
 - Electrical Interface: 5/24V ±20%, opto-isolated, sink or source (jumper selectable)
- Absolute (Optional)
 - Types: BiSS-C, EnDat 2.1 & 2.2, Smart-Abs, SSI, Sanyo-Denki, Panasonic A4
 - Max Frequency: EnDat- 2MHz, Smart-Abs-2.5MHz, BiSS-C- 10MHz, Panasonic- 2.5MHz, Sanyo- 2.5MHz
 - Electrical Interface: RS-485
 - Error Detection: CRC, timeout, encoder not ready
- Supply Output: 5.1V. Total available current for all digital encoders: 1.5A for all analog encoders and 1.5A for all digital encoders
- ID Chip Interface: 1 per axis. For identification of compatible stages' configuration parameters.

Functional Safety I/O (Optional)

- Safe Torque Off (STO) Input
 - Electrical Interface: Dual-channel 24V isolated
 - Safety Standards: See Standards and Certifications Section
- Safe Stop 1 (SS1) Feature
 - Deceleration time till STO activation: 110-230ms.
 - Exact deceleration time value is fixed (SS1-t functionality) and depends on product configuration (see user manual for more details)

Digital I/O (All are usable as general purpose)

- Total Quantity: 12/16
- High-Speed Position Capture (MARK) Inputs
 - Qty: 4
 - Electrical Interface: 5/24V ±20%, Opto-isolated, two terminals
 - Max Capture Frequency: 500 Hz
- Limit Sensor Inputs
 - Qty: 8 (See Feedback section for more details)
- High-Speed Position Event Generation (PEG) Outputs
 - Qty: 4
 - Electrical Interface: RS-422
 - Max Pulse Frequency: 10 MHz
 - Pulse Width Range: 27 ns to 1.745 ms
- Brake Outputs
 - Qty: 4
 - Electrical Interface: 5/24V ±20%, opto-isolated, sink or source (jumper selectable)
 - Output Current: 100 mA

Specifications Continued

- General Purpose Outputs
 - Qty: 8
 - Max Update Frequency: 1 kHz
 - Electrical Interface: RS-422

Analog I/O (All are usable as general purpose)

- Analog Inputs
 - Qty: 2
 - Electrical Interface: +/-10V differential or +/-5V single ended
 - Resolution: 12 bit
 - Max Sampling Frequency: 1 kHz
- Analog Outputs
 - Qty: 2
 - Electrical Interface: +/-10V differential or +/-5V single ended
 - Resolution: 10 bit
 - Max Ripple: 25 mV
 - Max Load: 10 kOhm
 - Max Update Frequency: 1 kHz

Standards and Certifications (Pending)

- CE Self Declaration: Yes
- CE Electrical Safety: IEC61800-5-1
- CE EMC: EN 61800-3
- UL Electrical Safety: UL 61800-5-1
- STO Functional Safety: IEC 61800-5-1, IEC 61800-5-2
- SS1 Functional Safety: IEC 61800-5-1, IEC 61800-5-2

Physical

- Dimensions: 168 x 158 x 48.3 mm
- Weight: 800g
- Environmental
 - Operational Temperature: 0 to 50C. See user manual for external fan cooling requirements above 40C ambient temperature.
 - Humidity: 5 to 90% non-condensing humidity.
 - Storage and Transportation Temperature: -25 to 60C
 - Shock: 50 m/s² (5 G)
 - Vibration: 10 m/s² (1 G)

Optional Accessory Products

- XDMsm-ACC1: Mating Connector Kit
- STO-ACC1: STO Breakout Cable
- SPI-ACC1: SPI Breakout Cable
- RS232-ACC1: RS232 Adapter Cable

Ordering Options

	Field	Example selection by user	Optional Values
Number of axes	1	4	2, 4
Current Rating (Amps peak of sine)	2	C	A=1.25/2.5A, B=2.5/5A, C=5/10A
Number of 500 kHz SinCos Encoder Channels	3	0	0, 1, 2, 3, 4
Number of Absolute Encoder Channels	4	3	0, 1, 2, 3, 4
Functional Safety	5	T	N=No, T=STO & SS1
Reserved for future	6	N	N = N/A
Reserved for future	7	N	N = N/A
Reserved for future	8	N	N = N/A
Reserved for future	9	N	N = N/A
Reserved for future	10	N	N = N/A

Example P/N: ECMsm-4C03T-NNNNN **Description:** 4 axis 5/10A, 3x Absolute encoder, STO & SS1

Field	1	2	3	4	5	6	7	8	9	10
P/N ECMsm	4	C	0	3	T	N	N	N	N	N

For the latest version of this document visit our website at www.acsmotioncontrol.com

Smarter Motion

